




FANOTECH Waste Equipment

Open Top Roll Off Container

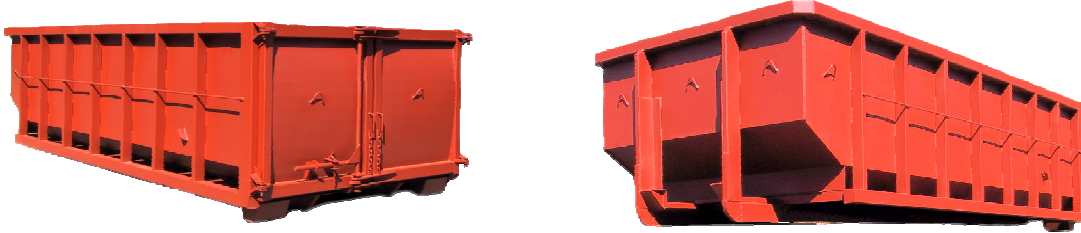

Design Features

- Wide open easy access hook up.**
- Bumper plate prevents front damage.**
- Compact heavy duty door hinges.**
- Unique single lever door locking mechanism.**
- Outboard rail increases side rigidity.**
- Tubular frame construction for maximum strength & minimum rust corrosion.**

Long service, low maintenance and all around good value will make a positive contribution to your *profitable* operation.


STANDARD Specifications

- Understructure:** ¼" Floor, full length – one piece.
3" Channel cross members, 18" on centres.
12" Spacing at rear.
¼" x 4" rider bar.
Rear skid pads, 12".
- Sides:** 10 Ga. Side sheets.
4" x 4" Hollow Structural Steel Tube Top rail.
2" x 4" Hollow Structural Steel Tube Vertical posts.
6" x 4" Hollow Structural Steel Tube Rear post for maximum side rigidity.
- Doors:** Two-piece barn style doors.
10 Ga. Curved face door sheet.
Heavy duty compact hinges.
Dual safety lock including chains to hold door in open position.
- Front:** 10 Ga. Sheet reinforced vertically with 6"x 2" Hollow Structural Steel tube.
1" Plate pick up point.
Heavy 6" x 4" x ⅜" vertical bumper.
- Finish:** One coat primer, entire container.
One coat automotive enamel paint excluding interior.
Colour to customer specification.
- Misc:** Ladder on left front.
Tarp bars.
HD single lever door locking mechanism.
Sloped inside plate full length.
Full access dog house.

Options Available Top rail angle reinforcement 2 x 2 x ¼".
 Front or Rear Rollers, installed.
 Lead on rollers installed.
 Additional ladder, right front.
 Sign Plate.
 Single door instead of standard Barn style doors.
 Containers also available in Light Duty, Heavy-Duty and Xtra-Heavy Duty specifications.

Normally Stocked Sizes—Other Sizes Available on Request.


Model	Capacity Cu. Yards	Skid Length. <small>For O.A. Length add 12"</small>	Width Inside	O.A. Width	Wall Height <small>For O.A. Height add 9.25"</small>
RO-14-12B	14	12'	88"	96"	52"
RO-20-17.5B	20	17.5'	88"	96"	52"
RO-30-20.5B	30	20.5'	88"	96"	65"
RO-40-20.5B	40	20.5'	88"	96"	87"

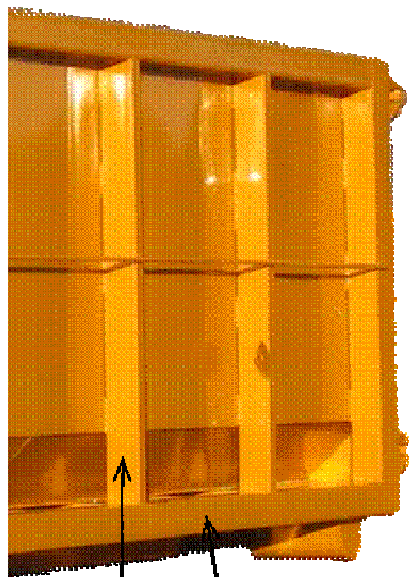

**Outside Rail
Increases Side
Rigidity. Protection
Against Severe
Service.**

**Tubular Frame Construction for
Maximum Strength & Minimum
Rust.**

Bumper Plate Prevents Front Damage

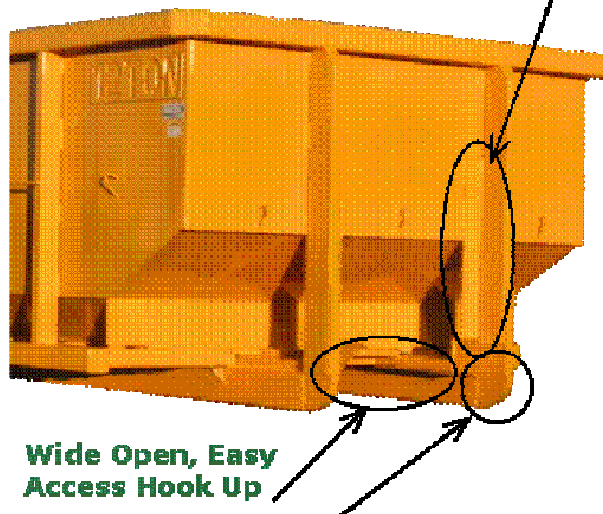

**Wide Open, Easy
Access Hook Up**

Note: Specifications subject to change without notice.